LED Tubular Work Light ONN-M9



Introduction:

1. ONN-M9 is designed for harsh environment.
2. Using anodized aluminum lamp body and tempered glass.
3. IP67 rating, resistant to high pressure wash, coolants and detergents.
4. High brightness SMD2835 LED chip, 120lm/w.
5. Frosted cover available to decrease glare.
6. Easy to install, lighting direction can be adjusted after installation.
7. Two input voltages optional: AC100-240V 50/60Hz, AC/DC24V.


Application:

CNC machine work: engraving machine, EDM machine etc.
Assembly and repair work table.
Laboratories.

Warranty: 2 years

Certification: CE, RoHS, FCC

Dimension(mm):

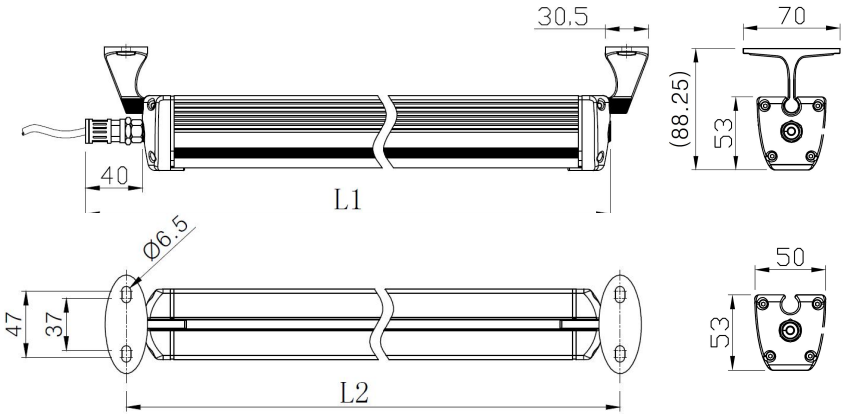

	300S	400S	600S	800S
L1	334	474	674	874
L2	320~330	470~480	670~680	870~880

Ordering code:

ONN M9 - B 1 600S 12W


- Model No.
- Voltage: B. AC/DC24V; C. AC100-240V
- Color temperature: 1.6000-6500K (Cool white); 2.4000-4500K (Natural white); 3.2800-3200K (Warm white)
- Length: 300S. 300mm 400S. 400mm 600S. 600mm 800S. 800mm
- Power: 7W, 12W, 16W, 20W


Parameter:

Power(length)	7W(300mm), 12W(400mm), 16W(600mm), 20W(800mm)
Input voltage(current)	AC100-240V(50/60Hz), AC/DC24V,
Lumen efficiency	120lm/w
CRI	>80
IP rating	IP67
Beam angle	110 degree
Color temperature	2800-3200K, 4000-4500K, 6000-6500K
Material	Aluminum housing , Tempered glass
Lifetime	50,000 hours
Working temperature/ humidity	-20~45℃ / 10%-90%
Storage temperature/ humidity	-40~60℃ / 10%-90%
Installation	Fixed by brackets

Shenzhen Onn Semi-conductor lighting Co.,Ltd
Tel: +86-755-29566420 Fax: +86-755-27871421 Web: www.onnled.net www.onlion88.com
Add: Haofeng Industrial Park NO.2 Zone, Xinhe, Bao'an District, Shenzhen, China.

Light distribution data (16W)

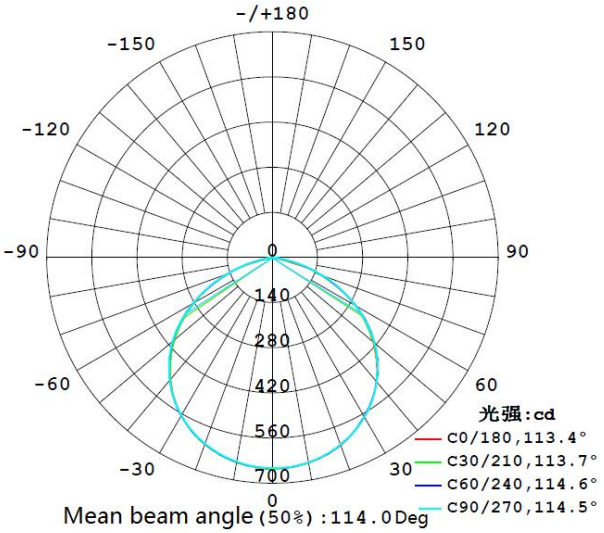


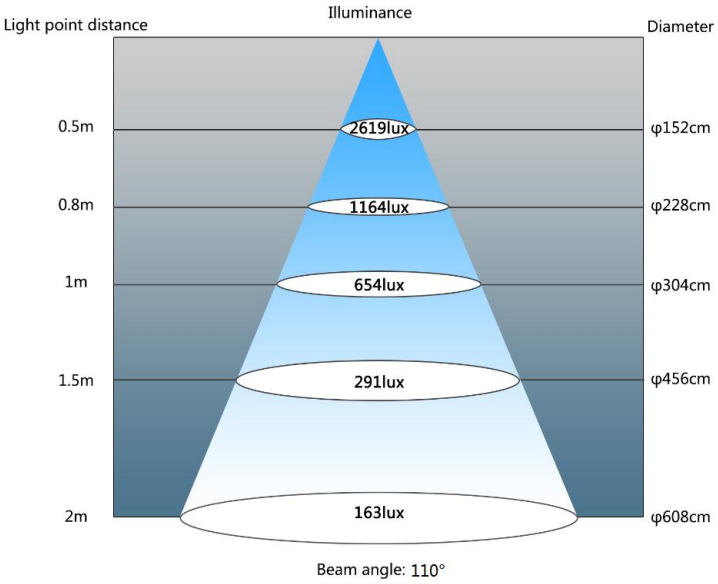

Wire connection:

DC12/24V Cable

Positive(+): Red



Negtive(-): White

AC100-240V Cable

L : Brown



N : Blue

Package info

	300S	400S	600S	800S
Qty/carton	24pcs/carton	12pcs/carton	12pcs/carton	9pcs/carton
Carton Size	L780*W285*H233mm	L580*W285*H233mm	L780*W285*H233mm	L980*W210*H233mm
Net Weight	12.72kg	8.46kg	12.4kg	10.98kg
Gross Weight	15.7kg	10.28kg	14.69kg	13.21kg

