LED Tubular Work Light ONN-M9R

Introduction:

1. ONN-M9R is designed for harsh environment.
2. Using anodized aluminum lamp body and tempered glass.
3. IP67 rating, resistant to high pressure wash, coolants and detergents.
4. High brightness SMD2835 LED chip, 100lm/w.
5. Frosted cover available to decrease glare.
6. Easy to install and control the lighting direction.
7. Two input voltages optional: AC100-240V 50/60Hz, AC/DC24V.



Application:

CNC machine work: engraving machine, EDM machine etc.
Assembly and repair work.
Laboratories.

Warranty: 2 years

Certification: IP67, IP69K, TUV CE , UL , Atex

Dimension(mm):



	300S	400S	600S	800S
L1	375	515	715	915
L2	335±3	475±3	675±3	875±3
L3	325±3	465±3	665±3	765±3
L4	315±3	455±3	655±3	755±3

Ordering code:

ONN M9R - B 1 600S 12W


- Model No.
- Voltage:
  B. AC/DC24V
  C. AC100-240V
- Color temperature
  1.6000-6500K (Cool white)
  2.4000-4500K (Natural white)
  3.2800-3200K (Warm white)
- Length
  300S. 300mm 400S. 400mm
  600S. 600mm 800S. 800mm
- Power: 7W, 12W, 16W, 20W


Parameter:

Power(length)	7W(300mm), 12W(400mm), 16W(600mm), 20W(800mm)
Input voltage(current)	AC100-240V(50/60Hz), AC/DC24V,
Lumen efficiency	100lm/w
CRI	>80
IP rating	IP67
Beam angle	110 degree
Color temperature	2800-3200K, 4000-4500K, 6000-6500K
Material	Aluminum housing , Tempered glass /PC
Lifetime	50,000 hours
Working temperature/ humidity	-20~45℃ / 10%-90%
Storage temperature/ humidity	-40~60℃ / 10%-90%
Installation	Fixed by brackets


Shenzhen Onn Semi-conductor lighting Co.,Ltd
Tel: +86-755-29566420 Fax: +86-755-27871421 Web: www.onnled.net www.onlion88.com
Add: Haofeng Industrial Park NO.2 Zone, Xinhe, Bao'an District, Shenzhen, China.


Light distribution data (16W)

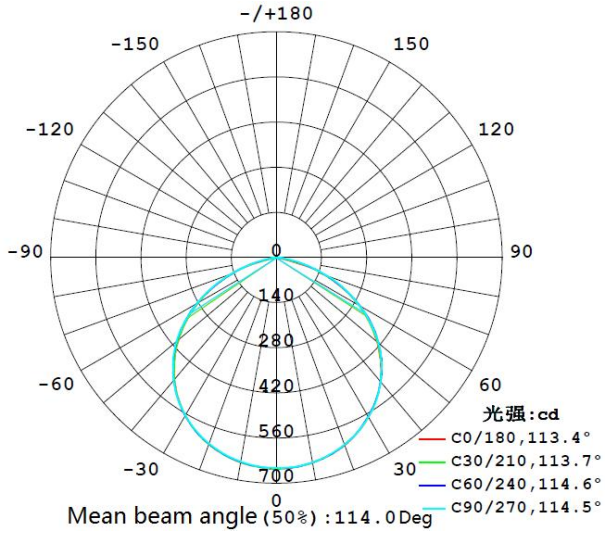

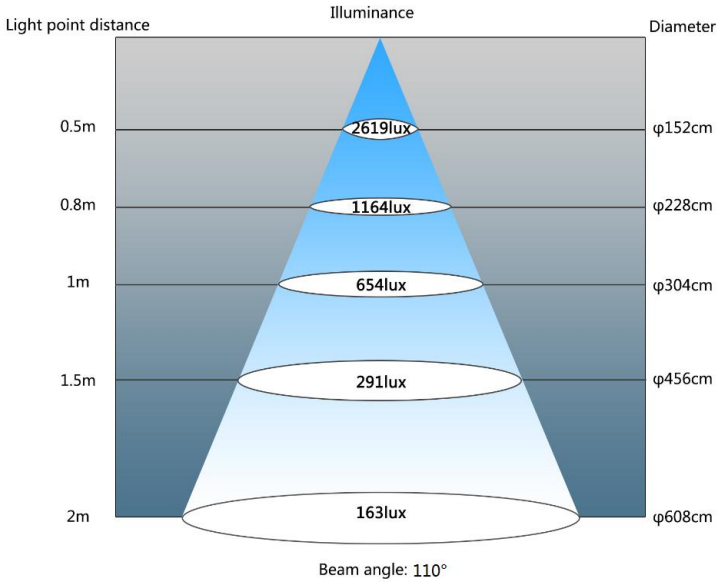

Wire connection:

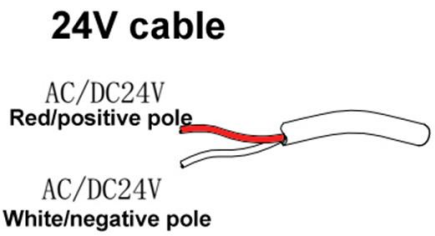

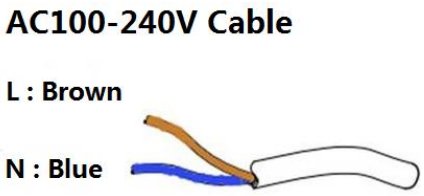

Package info

	300S	400S	600S	800S
Qty/carton	24pcs/carton	12pcs/carton	12pcs/carton	12pcs/carton
Carton Size	L780*W340*H233mm	L580*W340*H233mm	L780*W340*H233mm	L980*W340*H233mm
Net Weight	13.2kg	8.9kg	12.7kg	15.4kg
Gross Weight	16kg	11kg	16kg	19kg

